





屏蔽泵




北京金龙泉泵业有限公司
www.jlqpumps.com

QPG25/2-16~32系列

性能曲线



外形图

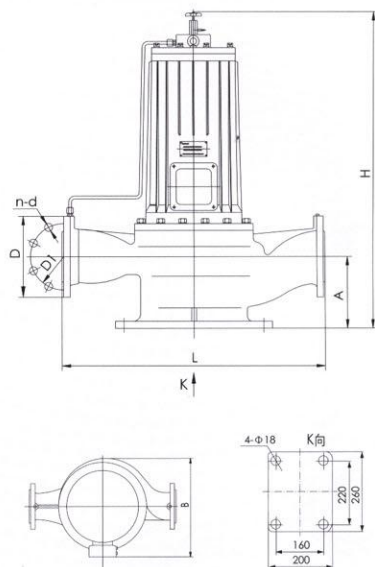

隔振器规格: JG1-1

性能参数



型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)
	(m³/h)	(L/s)						
QPG25-130	2	0.55	20	3000	1.1	3.1	43	45
QPG25-130A	2	0.55	16	3000	0.75	2.5	43	40
QPG25-160	2	0.55	32	3000	2.2	6	45	55
QPG25-160A	2	0.55	28	3000	1.5	4.2	45	50

外形安装尺寸




外形安装尺寸				进出法兰尺寸		
L	B	H	A	D	D1	n-d
400	300	640	100	Φ115	Φ85	4-Φ14
420	300	640	75	Φ115	Φ85	4-Φ14

QPG40/6.3-10~50系列

性能曲线



外形图

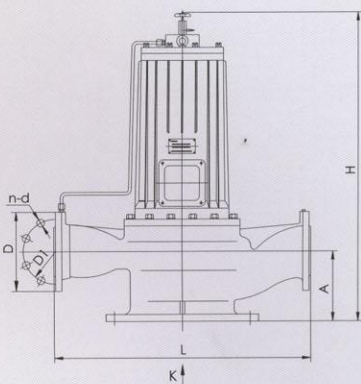

隔振器规格: JG1-1

性能参数



型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kW)	额定 电流 (A)	噪声 dB(A)	重量 (kg)
	(m³/h)	(L/S)						
QPG40-100	4.4	1.22	13.2	3000	0.75	2.5	43	55
	6.3	1.75	12.5					
	8.3	2.31	11.3					
QPG40-100A	3.9	1.08	10.6	3000	0.75	2.5	43	55
	5.6	1.56	10					
	7.4	2.06	9					
QPG40-130	4.4	1.22	21	3000	1.1	3.1	43	55
	6.3	1.75	20					
	8.3	2.31	18					
QPG40-130A	3.9	1.08	17	3000	0.75	2.5	43	55
	5.6	1.56	16					
	7.4	2.06	14					

外形安装尺寸


外形安装尺寸				进出法兰尺寸		
L	B	H	A	D	D1	n-d
420	300	640	100	Φ150	Φ110	4-Φ18
420	300	640	100	Φ150	Φ110	4-Φ18

QPG40/6.3-10~50系列

性能曲线



外形图

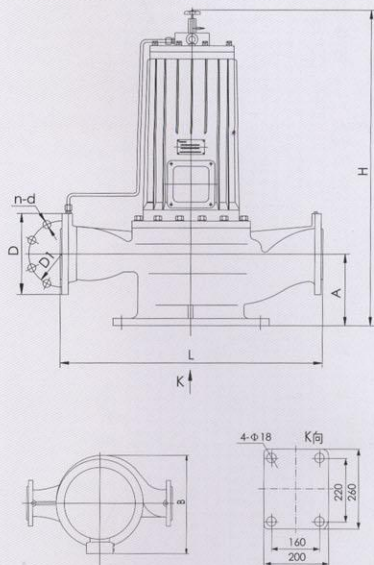

隔振器规格: JG1-1

性能参数



型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kW)	额定 电流 (A)	噪声 dB(A)	重量 (kg)
	m³/h	l/s						
QPG40-160	4.4	1.22	33	3000	2.2	6	45	60
	6.3	1.75	32					
	8.3	2.31	30					
QPG40-160A	4.1	1.14	29	3000	1.5	4.2	45	57
	5.9	1.64	28					
	7.8	2.17	26					
QPG40-160B	3.7	1.06	25.5	3000	1.1	3.1	45	55
	5.5	1.53	24					
	7.0	1.94	22.5					
QPG40-200	4.4	1.22	51	3000	4	9.8	53	90
	6.3	1.75	50					
	8.3	2.31	48					
QPG40-200A	4.1	1.14	45	3000	3	7.8	53	85
	5.9	1.64	44					
	7.8	2.17	42					
QPG40-200B	3.7	1.05	38	3000	2.2	6	53	70
	5.3	1.47	36					
	7.0	1.94	34.5					

外形安装尺寸


外形安装尺寸				进出法兰尺寸		
L	B	H	A	D	D1	n-d
420	300	640	100	Φ150	Φ110	4-Φ18
420	350	750	100	Φ150	Φ110	4-Φ18
420	330	640	100	Φ150	Φ110	4-Φ18

QPG50/12.5-10~50系列

性能曲线



外形图


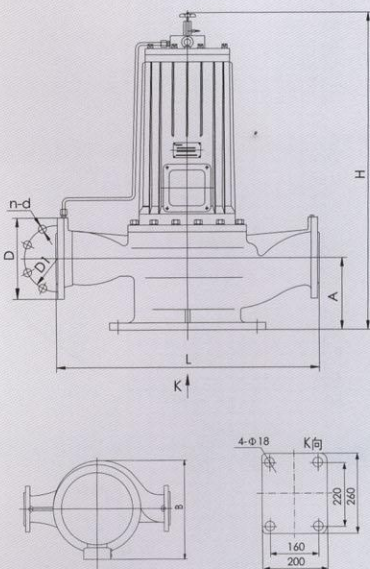


隔振器规格: JG1-1




型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)	外形安装尺寸				进出法兰尺寸		
	(m³/h)	(L/S)							L	B	H	A	D	D1	n-d
QPG50-100	8.8	2.44	13.6	3000	1.1	3.1	43	65	420	330	640	100	φ165	φ125	4-φ18
	12.5	3.47	12.5												
	16.3	4.53	11.3												
QPG50-100A	8	2.22	11	3000	0.75	2.5	43	60	420	330	640	100	φ165	φ125	4-φ18
	11	3.05	10												
	14.5	4.03	9												
QPG50-130	8.8	2.44	21.5	3000	1.5	4.2	43	65	420	330	640	100	φ165	φ125	4-φ18
	12.5	3.47	20												
	16.3	4.53	18												
QPG50-130A	8	2.22	17	3000	1.1	3.1	43	60	420	330	640	100	φ165	φ125	4-φ18
	11	3.05	16												
	14.5	4.03	14												

QPG50/12.5-10~50系列

性能曲线



外形图

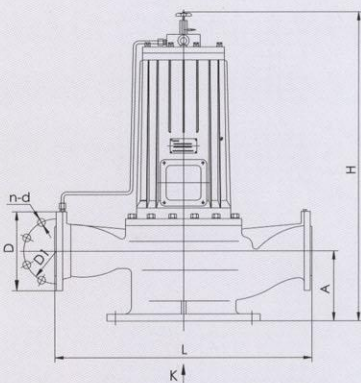

隔振器规格: JG1-1



性能参数

外形安装尺寸




型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)	外形安装尺寸				进出法兰尺寸		
	(m³/h)	(L/S)							L	B	H	A	D	D1	n-d
QPG50-160	8.8	2.44	33	3000	3	7.8	45	95	420	350	750	100	Φ165	Φ125	4-Φ18
	12.5	3.47	32												
	16.3	4.53	30												
QPG50-160A	8.2	2.28	29	3000	2.2	6	45	85	420	330	640	100	Φ165	Φ125	4-Φ18
	11.7	3.25	28												
	15.2	4.22	26												
QPG50-160B	7.3	2.03	23	3000	1.5	4.2	45	80							
	10.4	2.89	22												
	13.5	3.75	20.5												
QPG50-200	8.8	2.44	52	3000	5.5	13.5	53	110							
	12.5	3.47	50												
	16.3	4.53	48												
QPG50-200A	8.3	2.31	45.8	3000	4	9.8	53	105	450	350	750	100	Φ165	Φ125	4-Φ18
	11.7	3.25	44												
	15.3	4.25	42												
QPG50-200B	7.5	2.08	37	3000	3	7.8	53	90							
	10.6	2.94	36												
	13.8	3.83	34												

QPG65/25-10~50系列

性能曲线



外形图

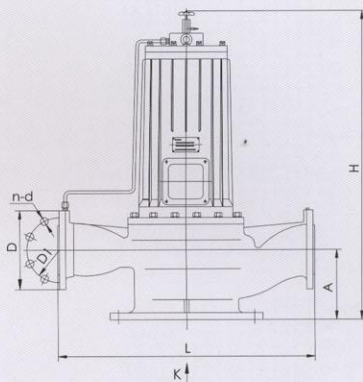

隔振器规格: JG1-1

性能参数



型号	流量 (m³/h)	流量 (L/S)	扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)
QPG65-100	17.5	4.86	14	3000	2.2	6	43	85
	25	6.94	12.5					
	32.5	9.03	10.5					
QPG65-100A	15.6	4.3	11	3000	1.5	4.2	43	80
	22.3	6.19	10					
	29	8.1	8.4					
QPG65-130	17.5	4.86	21.5	3000	3	7.8	45	100
	25	6.94	20					
	32.5	9.03	18					
QPG65-130A	15.6	4.33	17	3000	2.2	6	45	85
	22.3	6.19	16					
	29	8.1	14					

外形安装尺寸




外形安装尺寸				进出法兰尺寸		
L	B	H	A	D	D1	n-d
420	330	660	110	Φ185	Φ145	4-Φ18
420	350	770	110	Φ185	Φ145	4-Φ18
420	330	660	110	Φ185	Φ145	4-Φ18

QPG65/25-10~50系列

性能曲线



外形图

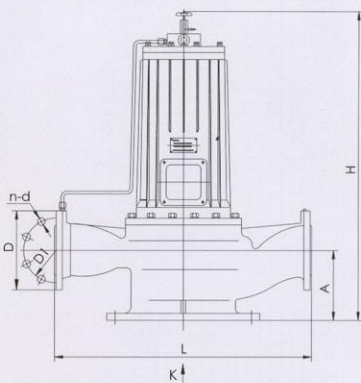

隔振器规格: JG1-1

性能参数



型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)
	(m³/h)	(L/S)						
QPG65-160	17.5	4.86	34	3000	4	9.8	45	105
	25	6.94	32					
	32.5	9.03	27					
QPG65-160A	16.4	4.56	30	3000	4	9.8	45	100
	23.4	6.5	28					
	30.4	8.44	24					
QPG65-160B	15	4.17	26	3000	3	7.8	45	90
	21.6	6	24					
	28	7.78	20.6					
QPG65-200	17.5	4.86	52	3000	7.5	19	55	150
	25	6.94	50					
	32.5	9.03	46					
QPG65-200A	16.4	4.56	46.5	3000	7.5	19	55	145
	23.5	6.53	44					
	30.5	8.47	40					
QPG65-200B	15.2	4.22	40	3000	5.5	13.5	55	120
	21.8	6.06	38					
	28.3	7.86	34					

外形安装尺寸




外形安装尺寸				进出法兰尺寸		
L	B	H	A	D	D1	n-d
450	350	750	100	Φ185	Φ145	4-Φ18
500	350	760	110	Φ185	Φ145	4-Φ18

QPG80/50-10~50系列

性能曲线



外形图

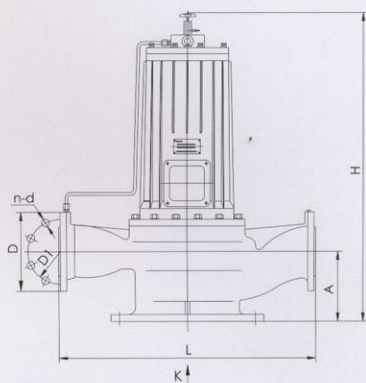

隔振器规格: JG1-1


性能参数

外形安装尺寸




型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)	外形安装尺寸				进出法兰尺寸		
	(m³/h)	(L/S)							L	B	H	A	D	D1	n-d
QPG80-100	35	9.72	13.8	3000	3	7.8	45	100	450	350	780	110	Φ200	Φ160	8-Φ18
	50	13.9	12.5												
	65	18.1	10												
QPG80-100A	31.3	8.7	11	3000	2.2	6	45	90	450	330	670	110	Φ200	Φ160	8-Φ18
	44.7	12.4	10												
	58	16.1	8												
QPG80-130	35	9.72	22	3000	5.5	13.5	48	120	450	350	780	110	Φ200	Φ160	8-Φ18
	50	13.9	20												
	65	18.1	17												
QPG80-130A	31.3	8.7	17.5	3000	4	9.8	48	115	450	350	780	110	Φ200	Φ160	8-Φ18
	45	12.5	16												
	58	16.1	13.6												

QPG80/50-10~50系列

性能曲线



外形图

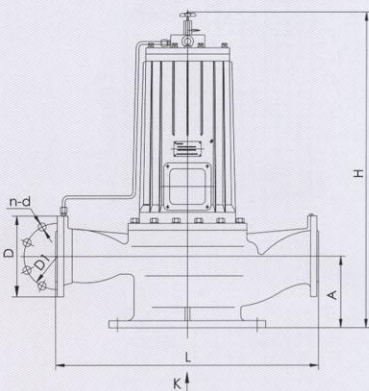

隔振器规格: JG1-1


性能参数

外形安装尺寸




型号	流 量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)	外形安装尺寸				进出法兰尺寸									
	(m³/h)	(L/S)							L	B	H	A	D	D1	n-d							
QPG80-160	35	9.72	35	3000	7.5	19	48	150	500	350	800	135	Φ200	Φ160	8-Φ18							
	50	13.9	32																			
	65	18.1	28																			
QPG80-160A	32.7	9.1	30.6	3000	7.5	19	48	145														
	46.7	13.0	28																			
	61	16.9	24																			
QPG80-160B	30.3	8.4	26	3000	5.5	13.5	48	140														
	43.3	12.0	24																			
	56.3	15.6	21																			

QPG80/50-10~50系列

性能曲线



外形图

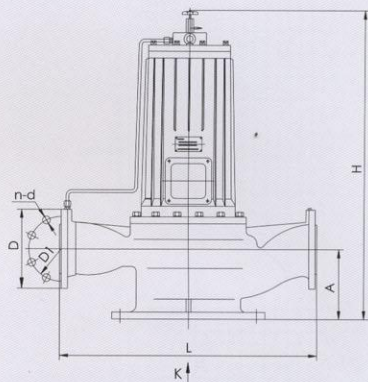

隔振器规格: JG2-2

性能参数



型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)
	(m³/h)	(L/S)						
QPG80-200	35	9.72	53.5	3000	15	35	58	215
	50	13.9	50					
	65	18.1	46					
QPG80-200A	32.8	9.1	47	3000	11	26	58	200
	47	13.1	44					
	61	16.9	40					
QPG80-200B	30.5	8.5	40.5	3000	7.5	19	58	180
	43.5	12.1	38					
	56.6	15.7	33.4					

外形安装尺寸




外形安装尺寸				进出法兰尺寸		
L	B	H	A	D	D1	n-d
550	410	880	150	Φ200	Φ160	8-Φ18
550	390	810	150	Φ200	Φ160	8-Φ18

QPG100/100-10~50系列

性能曲线



外形图

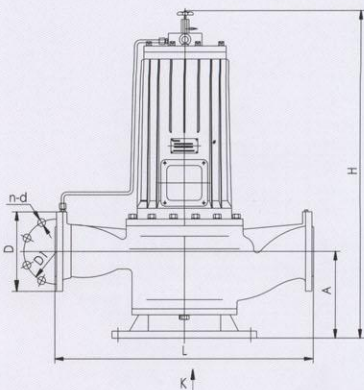

隔振器规格: JG3-2



性能参数

外形安装尺寸




型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)	外形安装尺寸				进出法兰尺寸		
	(m³/h)	(L/S)							L	B	H	A	D	D1	n-d
QPG100-220	70	19.4	13.6	1500	5.5	14	50	260	700	480	990	245	Φ220	Φ180	8-Φ18
	100	27.8	12.5												
	130	36.1	11												
QPG100-220A	62.6	17.4	11	1500	4	11.2	50	220	700	450	920	245	Φ220	Φ180	8-Φ18
	89	24.7	10												
	116	32.2	8.8												
QPG100-260	70	19.4	23.5	1500	11	28.3	50	300	700	540	1050	245	Φ220	Φ180	8-Φ18
	100	27.8	20												
	130	36.1	14												
QPG100-260A	62.6	17.4	19	1500	7.5	19.5	50	280	700	480	990	245	Φ220	Φ180	8-Φ18
	89	24.7	16												
	116	32.2	11												

QPG100/100-10~50系列

性能曲线



外形图

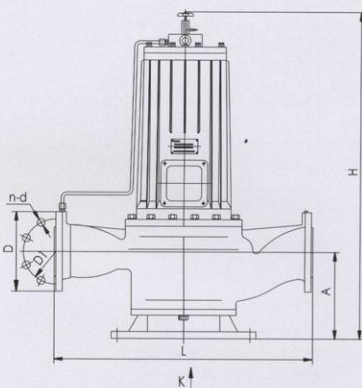

隔振器规格: JG3-2

性能参数



型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)
	(m³/h)	(L/S)						
QPG100-315	70	19.4	36.5	1500	15	38.5	50	380
	100	27.8	32					
	130	36.1	24					
QPG100-315A	65.4	18.2	32	1500	11	28.3	50	360
	93.5	26	28					
	121.6	33.8	21					
QPG100-315B	60.6	16.8	27	1500	11	28.3	50	360
	86.6	24.1	24					
	112.5	31.3	18					
QPG100-400	70	19.4	54	1500	25	61	53	450
	100	27.8	50					
	130	36.1	42					
QPG100-400A	65.4	18.2	47.5	1500	22	53	53	400
	93.5	26.0	44					
	121.6	33.8	37					
QPG100-400B	61	16.9	41	1500	18.5	45	53	360
	87	24.2	38					
	113	31.4	32					

外形安装尺寸




外形安装尺寸				进出法兰尺寸		
L	B	H	A	D	D1	n-d
700	540	1080	275	Φ220	Φ180	8-Φ18
780	580	1200	275	Φ220	Φ180	8-Φ18
780	500	1090	275	Φ220	Φ180	8-Φ18

QPG125/160-10~50系列

性能曲线



外形图

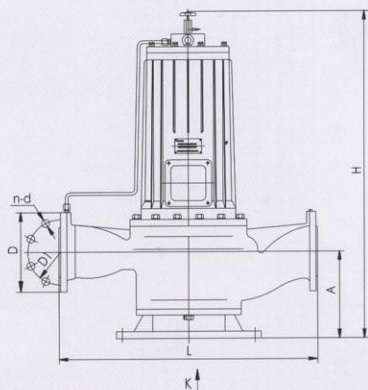

隔振器规格: JG3-2



性能参数

外形安装尺寸



型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)	外形安装尺寸				进出法兰尺寸		
	(m³/h)	(L/S)							L	B	H	A	D	DI	n-d
QPG125-220	96	26.7	13	1500	11	28.3	48	380	780	560	1100	285	Φ250	Φ210	8-Φ18
	160	44.4	12.5												
	192	53.3	12												
QPG125-220A	86	23.9	10.4	1500	7.5	19.5	48	340	780	480	1040	285	Φ250	Φ210	8-Φ18
	143	39.7	10												
	172	47.8	9.6												
QPG125-260	96	26.7	22.6	1500	15	38.5	50	440	780	560	1100	285	Φ250	Φ210	8-Φ18
	160	44.4	20												
	192	53.3	17												
QPG125-260A	86	23.9	18	1500	11	28.3	50	420							
	143	39.7	16												
	172	47.8	13.6												

QPG125/160-10~50系列

性能曲线



外形图

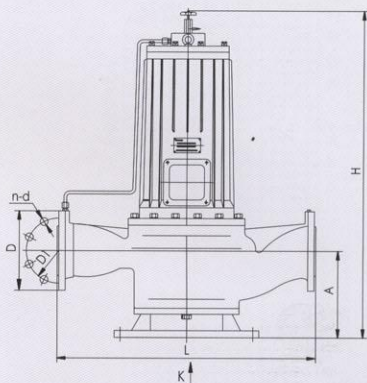

隔振器规格: JG3-2

性能参数



型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)
	(m³/h)	(L/S)						
QPG125-315	96	26.7	36	1500	22	54	53	480
	160	44.4	32					
	192	53.3	28					
QPG125-315A	90	25	31.5	1500	18.5	46	53	450
	150	41.7	28					
	180	50	24.5					
QPG125-315B	83	21.7	27	1500	15	38.5	53	420
	136	38.3	24					
	166	46.1	21					
QPG125-400	96	26.7	55	1500	37	89	58	560
	160	44.4	50					
	192	53.3	46					
QPG125-400A	90	25	48.5	1500	30	72	58	530
	150	41.7	44					
	180	50	40.4					
QPG125-400B	83	21.7	41.3	1500	22	54	58	510
	138	38.3	37.5					
	166	46.1	34.5					

外形安装尺寸




外形安装尺寸				进出法兰尺寸		
L	B	H	A	D	D1	n-d
800	560	1240	310	Φ250	Φ210	8-Φ18
800	480	1140	310	Φ250	Φ210	8-Φ18
900	600	1250	320	Φ250	Φ210	8-Φ18

QPG150/200-10~50系列

性能曲线



外形图

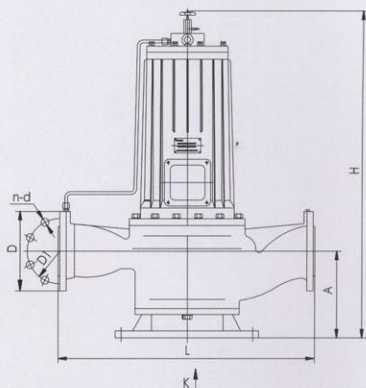

隔振器规格: JG3-2

性能参数



型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)
	(m³/h)	(L/S)						
QPG150-220	140	38.9	13.8	1500	15	38.5	53	420
	200	55.6	12.5					
	260	72.2	10.6					
QPG150-220A	125	34.7	11	1500	11	28.3	53	400
	179	49.7	10					
	232.5	64.6	8.5					
QPG150-260	140	38.9	21.8	1500	18.5	46	55	450
	200	55.6	20					
	260	72.2	17					
QPG150-260A	129	35.8	18.5	1500	15	38.5	55	420
	184.4	51.2	17					
	240	66.7	14.4					

外形安装尺寸




外形安装尺寸				进出法兰尺寸		
L	B	H	A	D	D1	n-d
780	540	1150	320	Φ285	Φ240	8-Φ22
780	540	1150	320	Φ285	Φ240	8-Φ22

QPG150/200-10~50系列

性能曲线



外形图

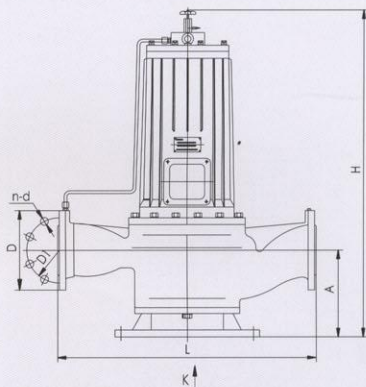

隔振器规格: JG3-2


性能参数

外形安装尺寸



型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)	外形安装尺寸				进出法兰尺寸		
	(m³/h)	(L/S)							L	B	H	A	D	DI	n-d
QPG150-315	140	38.9	33.8	1500	30	72	55	620	850	590	1250	290	Φ285	Φ240	8-Φ22
	200	55.6	32												
	260	72.2	28												
QPG150-315A	131	36.4	29.5	1500	22	54	55	590	850	510	1150	290	Φ285	Φ240	8-Φ22
	187	51.9	28												
	243	67.5	24.5												
QPG150-315B	121	33.6	25	1500	18.5	46	55	530	850	510	1150	290	Φ285	Φ240	8-Φ22
	173	48.1	24												
	225	62.5	21												
QPG150-400	140	38.9	53	1500	45	108	58	750	900	660	1400	405	Φ285	Φ240	8-Φ22
	200	55.6	50												
	260	72.2	44												
QPG150-400A	131	36.4	46.6	1500	37	89	58	650	900	610	1340	405	Φ285	Φ240	8-Φ22
	187	51.9	44												
	243	67.5	38.3												
QPG150-400B	122	33.9	40	1500	30	72	58	630	850	590	1250	290	Φ285	Φ240	8-Φ22
	174	48.3	38												
	226.5	62.9	33												
QPG150-400C	112	31.1	34	1500	22	54	58	600	850	590	1250	290	Φ285	Φ240	8-Φ22
	160	44.4	32												
	208	57.8	28												

QPG200/320-14~60系列

性能曲线



外形图

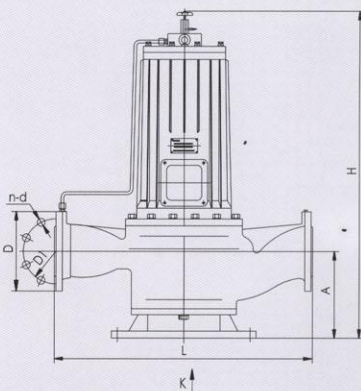

隔振器规格: JG4-2

性能参数


型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)
	(m³/h)	(L/S)						
QPG200-260	224	62.2	21.8	1500	30	72	55	590
	320	88.9	20					
	416	115.6	17					
QPG200-260A	210	58.4	18.5	1500	22	54	55	560
	300	83.3	17					
	390	108.4	14.5					
QPG200-260B	196	54.5	16	1500	18.5	46	55	500
	280	77.8	14					
	364	101.1	10					

外形安装尺寸



外形安装尺寸				进出法兰尺寸		
L	B	H	A	D	D1	n-d
1100	590	1310	360	Φ340	Φ295	12-Φ22
1100	530	1200	360	Φ340	Φ295	12-Φ22

QPG200/320-14~60系列

性能曲线



外形图

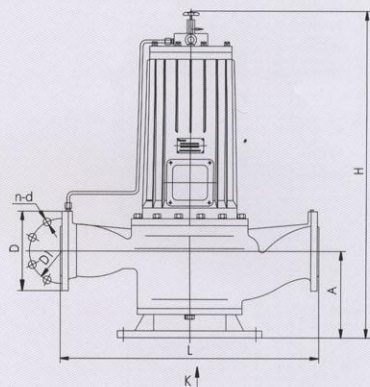

隔振器规格: JG4-2

性能参数



型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kW)	额定 电流 (A)	噪声 dB(A)	重量 (kg)
	(m³/h)	(L/S)						
QPG200-315	224	62.2	34	1500	45	108	58	750
	320	88.9	32					
	416	115.6	28					
QPG200-315A	210	58.4	30	1500	37	89	58	650
	300	83.3	28					
	390	108.4	24					
QPG200-315B	196	54.5	26	1500	30	72	58	530
	280	77.8	24					
	364	101.1	20					

外形安装尺寸




外形安装尺寸				进出法兰尺寸		
L	B	H	A	D	D1	n-d
1150	650	1350	340	Φ340	Φ295	12-Φ22
1150	600	1265	340	Φ340	Φ295	12-Φ22

QPG200/320-14~60系列

性能曲线



外形图

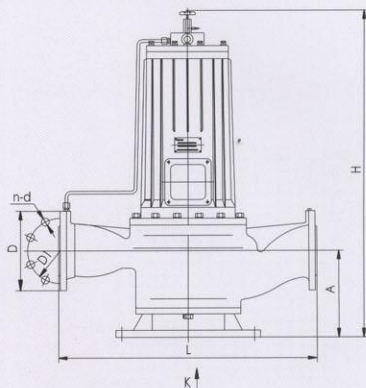

隔振器规格: JG4-2



性能参数

外形安装尺寸




型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)	外形安装尺寸				进出法兰尺寸		
	(m³/h)	(L/S)							L	B	H	A	D	DI	n-d
QPG200-400	224	62.2	53	1500	75	169	58	1200	1200	760	1500	395	Φ340	Φ295	12-Φ22
	320	88.9	50												
	416	115.6	44												
QPG200-400A	210	58.4	46.5	1500	55	131	58	880	1150	650	1350	340	Φ340	Φ295	12-Φ22
	300	83.3	44												
	390	108.4	39												
QPG200-400B	196	54.5	40	1500	45	108	58	850							
	280	77.8	38												
	364	101.1	33												
QPG200-400C	182	50.6	34	1500	37	89	58	780	1150	600	1290	340	Φ340	Φ295	12-Φ22
	260	72.2	32												
	338	93.9	28												
QPG200-440	224	62.2	63	1500	90	203	58	1400	1200	760	1500	395	Φ340	Φ295	12-Φ22
	320	88.9	60												
	416	115.6	51												

QPG200/400-13~50系列

性能曲线



外形图

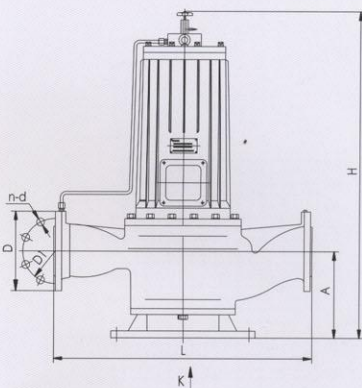

隔振器规格: JG4-2


性能参数

外形安装尺寸


型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kW)	额定 电流 (A)	噪声 dB(A)	重量 (kg)	外形安装尺寸				进出法兰尺寸		
	(m³/h)	(L/S)							L	B	H	A	D	D1	n-d
QPG200-260(I)	280	77.8	22.2	1500	30	72	55	620	1150	590	1310	360	Φ340	Φ295	12-Φ22
	400	111.1	20												
	520	144	14												
QPG200-260(I)A	250	69.4	18	1500	22	54	55	590	1150	590	1310	360	Φ340	Φ295	12-Φ22
	358	99.4	16												
	465	129.2	12												
QPG200-260(I)B	226	62.8	14.4	1500	18.5	46	55	530	1100	530	1200	360	Φ340	Φ295	12-Φ22
	322	89.4	13												
	419	116.4	7.3												
QPG200-315(I)	280	77.8	36	1500	55	131	58	900	1150	650	1350	340	Φ340	Φ295	12-Φ22
	400	111.1	32												
	520	144	26												
QPG200-315(I)A	262	72.8	31.5	1500	45	108	58	830	1150	650	1350	340	Φ340	Φ295	12-Φ22
	374	103.9	28												
	486	135	23												
QPG200-315(I)B	242	67.2	27	1500	37	89	58	760	1100	600	1310	340	Φ340	Φ295	12-Φ22
	346	96.1	24												
	450	125	19.5												

QPG200/400-13~50系列

性能曲线



外形图

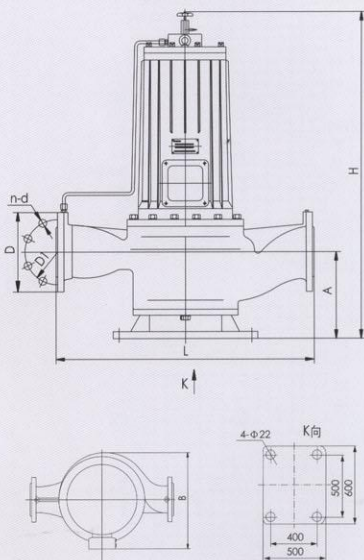

隔振器规格: JG4-2



性能参数

外形安装尺寸




型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)	外形安装尺寸				进出法兰尺寸		
	m³/h	(L/S)							L	B	H	A	D	D1	n-d
QPG200-400(I)	280	77.8	54.5	1500	90	203	58	1400	1200	760	1500	395	Φ340	Φ295	12-Φ22
	400	111.4	50												
	520	144	39												
QPG200-400(I)A	262	72.8	48	1500	75	169	58	1300	1150	650	1350	340	Φ340	Φ295	12-Φ22
	374	103.9	44												
	486	135	34												
QPG200-400(I)B	242	67.2	41.4	1500	55	131	58	900	1150	650	1350	340	Φ340	Φ295	12-Φ22
	346	96.1	38												
	450	125	29.6												
QPG200-400(I)C	224	62.2	34.9	1500	45	108	58	830	1150	650	1350	340	Φ340	Φ295	12-Φ22
	320	88.9	32												
	416	115.6	25												

QPG250/550-17~50系列

性能曲线



外形图

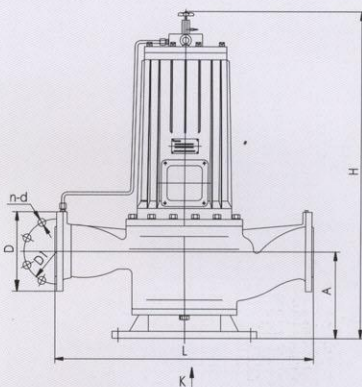

隔振器规格: JG4-2

性能参数


型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)
	(m³/h)	(L/S)						
QPG250-260	400	111.1	22.5	1500	45	108	58	860
	550	152.8	20					
	670	186.1	16					
QPG250-260A	368	102.2	19.5	1500	37	89	58	790
	506	140.3	17					
	607	168.7	14.6					
QPG250-315	400	111.1	36	1500	75	169	58	1300
	550	152.2	32					
	670	186.1	26					
QPG250-315A	368	102.2	31.5	1500	55	131	58	960
	506	140.6	28					
	607	168.7	23					
QPG250-315B	339	94	26.5	1500	45	108	58	900
	466	129.3	25					
	559	155.2	20					

外形安装尺寸




外形安装尺寸				进出法兰尺寸		
L	B	H	A	D	D1	n-d
1200	660	1470	415	Φ405	Φ355	12-Φ26
1200	610	1400	415	Φ405	Φ355	12-Φ26
1200	760	1530	415	Φ405	Φ355	12-Φ26
1200	660	1430	415	Φ405	Φ355	12-Φ26

QPG250/550-17~50系列

性能曲线



外形图

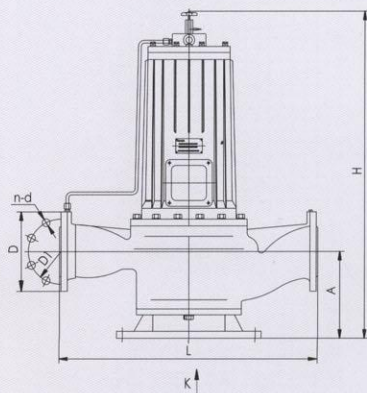

隔振器规格: JG4-2

性能参数


型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)
	(m³/h)	(L/S)						
QPG250-400	400	111.1	54.5	1500	110	260	58	1500
	550	152.8	50					
	670	186.1	39					
QPG250-400A	368	102.2	48	1500	90	203	58	1400
	506	140.6	44					
	607	168.7	35.5					
QPG250-400B	339	94	43	1500	75	169	58	1300
	466	129.3	39.5					
	559	155.2	32.5					
QPG250-400C	311	86.5	38	1500	55	131	58	900
	428	119	35					
	514	142.8	28					

外形安装尺寸




外形安装尺寸				进出法兰尺寸		
L	B	H	A	D	D1	n-d
1400	810	1560	420	Φ405	Φ355	12-Φ26
1200	760	1530	415	Φ405	Φ355	12-Φ26
1200	660	1430	415	Φ405	Φ355	12-Φ26

QPG300/720-12.5~70系列

性能曲线



外形图

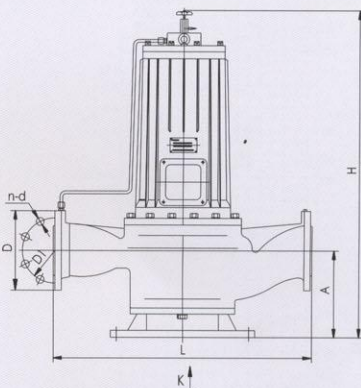

隔振器规格: JG4-2

性能参数



型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kW)	额定 电流 (A)	噪声 dB(A)	重量 (kg)
	(m³/h)	(L/S)						
QPG300-235	480	133.3	20	1500	55	131	58	1000
	720	200	18					
	900	250	15.5					
QPG300-235A	438	121.7	16.5	1500	45	108	58	930
	657	182.5	15					
	821	228.1	13					
QPG300-235B	400	111.1	14	1500	37	89	58	860
	600	167	12.5					
	750	208.3	11					

外形安装尺寸




外形安装尺寸				进出法兰尺寸		
L	B	H	A	D	D1	n-d
1100	660	1320	370	φ460	φ410	12-φ26

QPG300/720-12.5~70系列

性能曲线



外形图

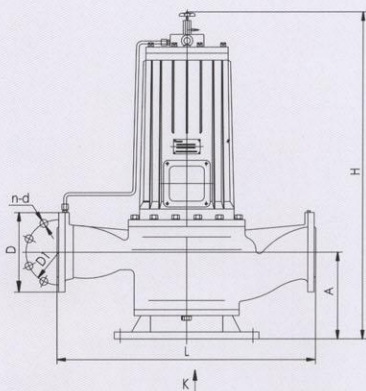

隔振器规格: JG4-2



性能参数

外形安装尺寸




型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)	外形安装尺寸				进出法兰尺寸		
	(m³/h)	(L/S)							L	B	H	A	D	DI	n-d
QPG300-300	480	133.3	31	1500	75	169	58	1200	1300	780	1600	415	Φ460	Φ410	12-Φ26
	720	200	28												
	900	250	25												
QPG300-300A	444	123.3	26.5	1500	75	169	58	1200	1300	780	1600	435	Φ460	Φ410	12-Φ26
	666	185	24												
	833	231.4	21.5												
QPG300-315	480	133.3	36	1500	90	203	58	1300	1300	780	1600	435	Φ460	Φ410	12-Φ26
	720	200	32												
	900	250	26												
QPG300-315A	460	127.8	30.5	1500	75	169	58	1200	1300	780	1600	435	Φ460	Φ410	12-Φ26
	662	184	28												
	791	219.8	23.5												

QPG300/720-12.5~70系列

性能曲线



外形图

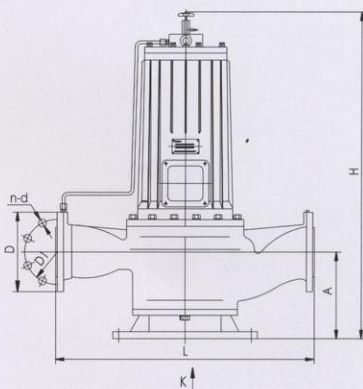

隔振器规格: JG4-2



性能参数

外形安装尺寸




型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kw)	额定 电流 (A)	噪声 dB(A)	重量 (kg)	外形安装尺寸				进出法兰尺寸		
	(m³/h)	(L/S)							L	B	H	A	D	D1	n-d
QPG300-430	504	140	59	1500	160	362	60	1800	1400	780	1640	435	Φ460	Φ410	12-Φ26
	720	200	55												
	864	240	49												
QPG300-430A	504	140	46.5	1500	132	300	60	1700	1400	800	1940	450	Φ460	Φ410	12-Φ26
	720	200	44												
	864	240	39												
QPG300-480	504	140	74	1500	220	500	60	2200	1400	800	1940	450	Φ460	Φ410	12-Φ26
	720	200	70												
	864	240	58												
QPG300-480A	504	140	65	1500	200	450	60	2000	1400	800	1940	450	Φ460	Φ410	12-Φ26
	720	200	62												
	864	240	51												
QPG300-480B	434	120.5	62	1500	160	362	60	1800	1400	780	1640	435	Φ460	Φ410	12-Φ26
	620	172.2	60												
	744	206.6	54												

QPG350/1000-20~70系列

性能曲线



外形图

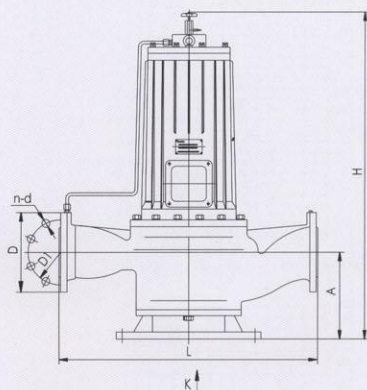

隔振器规格: JG4-2


性能参数

外形安装尺寸




型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kW)	额定 电流 (A)	噪声 dB(A)	重量 (kg)	外形安装尺寸				进出法兰尺寸		
	m^3/h	L/S							L	B	H	A	D	D1	n-d
QPG350-315	700	194.4	34	1500	132	300	60	1800	1500	780	1770	510	$\Phi 520$	$\Phi 470$	16- $\Phi 26$
	1000	277.7	32												
	1200	333.3	26												
QPG350-315A	630	175	29.5	1500	110	268	60	1700	1500	780	1770	510	$\Phi 520$	$\Phi 470$	16- $\Phi 26$
	900	250	28												
	1080	300	24												
QPG350-400	700	194.4	53	1500	220	500	60	2200	1500	810	2000	510	$\Phi 520$	$\Phi 470$	16- $\Phi 26$
	1000	277.7	45												
	1200	333.3	45												
QPG350-400A	700	194.4	47.5	1500	200	450	60	2000	1500	810	2000	510	$\Phi 520$	$\Phi 470$	16- $\Phi 26$
	1000	277.7	45												
	1200	333.3	40												
QPG350-400B	644	178.8	42	1500	160	362	60	1800	1500	810	2000	510	$\Phi 520$	$\Phi 470$	16- $\Phi 26$
	920	255.5	40												
	1104	306.6	35												

QPG350/1000-20~70系列

性能曲线



外形图

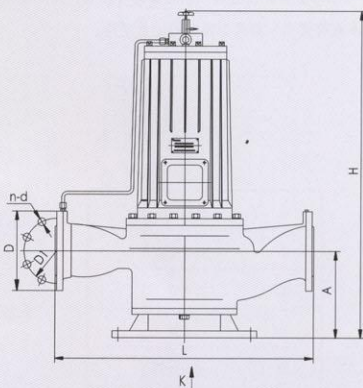

隔振器规格: JG4-2

性能参数

型号	流量		扬程 (m)	同步 转速 (r/min)	电机 功率 (kW)	额定 电流 (A)	噪声 dB(A)	重量 (kg)
	(m³/h)	(L/S)						
QPG350-480	700	194.4	73	1500	300	685	60	2700
	1000	277.7	70					
	1200	333.3	63					
QPG350-480A	700	194.4	67	1500	280	640	60	2600
	1000	277.7	65					
	1200	333.3	59					
QPG350-480B	672	196.6	62	1500	250	570	60	2400
	960	266.6	60					
	1152	320	54					


外形安装尺寸

外形安装尺寸				进出法兰尺寸		
L	B	H	A	D	D1	n-d
1600	830	2000	510	φ520	φ470	16-φ26

安装方式


QPG型屏蔽式空调、锅炉循环专用泵，外形美观大方，安装方便，占地面积小。本产品具有噪音低、振动小、效率高等优点，并可与隔振器配合使用。

①	进口阀门
②	挠性接头
③	弯管
④	直管
⑤	出口阀门
⑥	隔振器

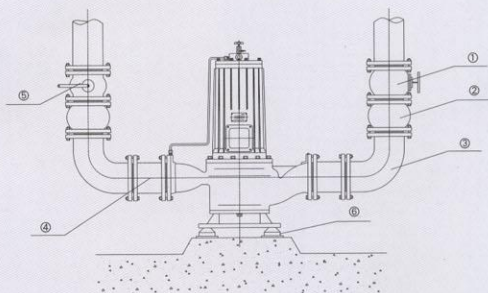


地基安装柔性联接

①	进口阀门
②	直管
③	弯管
④	出口阀门

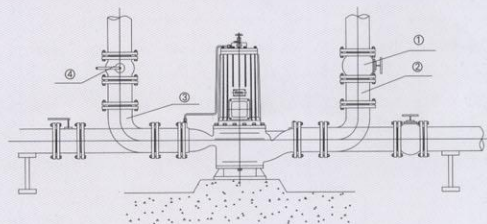


地基安装硬性联接

安装方式

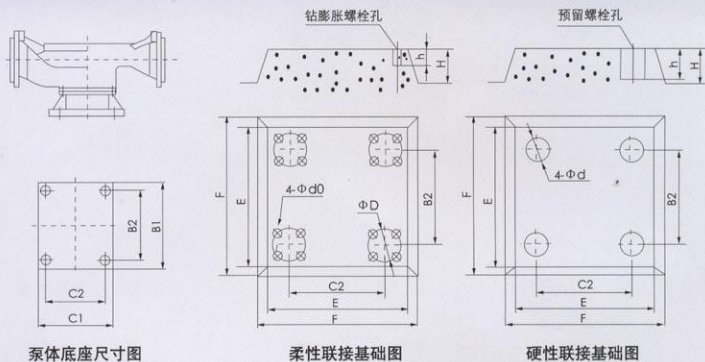

基础 序号	泵体底座尺寸		柔性联接基础尺寸								硬性联接基础尺寸							
	C2×B2	C1×B1	H	E	F	D	C2	B2	d ₀	h	H	E	F	C2	B2	d	h	
1	160×220	200×260	200	400	450	80	160	220	12.5	45	200	400	450	160	220	60	200	
2	210x260	250x300	200	500	550	130	210	260	12.5	45	200	500	550	210	260	60	200	
3	300×350	350×400	250	650	700	170	300	350	19	65	250	650	700	300	350	80	250	
4	350×450	400×500	300	750	800	170	350	450	19	65	300	750	800	300	450	80	300	
5	400×500	500×600	300	900	950	260	400	500	19	65	300	900	950	400	500	80	300	



JG型隔振器安装尺寸

型号	Md	D	D1	H	d ₀
JG1-1	M8	Φ100	Φ80	45	Φ8.5
LG2-2	M12	Φ150	Φ130	65	Φ8.5
JG3-2	M16	Φ200	Φ170	87	Φ12.5
JG4-2	M20	Φ290	Φ260	133	Φ12.5